

- Compact Class D Loop Amplifier
- Integrated switched-mode power supply
- 3 mixable Inputs
- Microphone input with 48V Phantom Power
- Microphone input with 5V PlugIn Power
- Balanced and unbalanced Line Inputs



The Pro Loop NX3 is primarily designed for continuous use. The integrated switch mode power supply and the Class-D amplifier design enable high efficiency and low waste heat. Among other things, this results in the high reliability and operational safety.

Automatic Gain Control (AGC) ensures a consistent level on the listening loop.

Metal Loss Correction (MLC) can be used to correct the frequency response due to metal structures.

The balanced input 1 can be switched between microphone and line sensitivity. It also provides 48V phantom power for condenser microphones.

The unbalanced input 2 handles line signals in two sensitivity levels or the audio signal of an electret microphone.

Input 3 is specially designed for connecting media players via a 3.5 mm stereo jack. Stereo signals are summed to mono.

TECHNICAL DATA	Item No. A-4230-0
Power supply	100-240 V AC 50/60 Hz
Power consumption max.	30W

Amplifier output	
Loop current max.:	2,5 A RMS
Loop voltage max.:	12 V RMS
Frequency range ($\pm 1,5$ dB):	80 Hz - 6 kHz
Loop resistance DC:	0,2 - 3,0 Ω

Outputs	
Loop connection:	2 pol. Euroblock plug

Inputs	
Input 1	5-20 mV / 2 k Ω / 48 V (MIC), balanced 25 mV - 2 V / 10 k Ω (LINE) balanced switchable, 3 pol. Euroblock plug H: ??? / 10 k Ω / (LINE) unbalanced 3 pol. Euroblock plug
Input 2	L: ??? / 10 k Ω (LINE) unbalanced 3 pol. Euroblock plug 5-20 mV / 2 k Ω / 5 V (MIC), unbalanced 3,5 mm stereo Jack
Input 3	25 mV - 0,7 V / 10 k Ω (LINE) unbalanced 3,5 mm stereo Jack

Automatic Gain Control (AGC)	
AGC:	voice-optimised
Dynamic range:	>40 dB

Metal Loss Correction (MLC)	
MLC:	0-4 dB/Octave


Cooling	
Art:	fanless

Mechanik	
Dimension (HxBxT)	33 x 167 x 97 mm
Weight:	442 g

Front view



Rear view

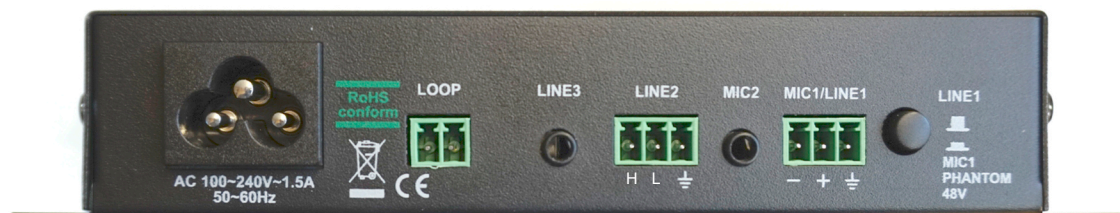

AUDIOropa is a brand of

Humantechnik GmbH
Im Wörth 25
D-79576 Weil am Rhein

info@audioropa.com
www.audioropa.com

Changes and errors excepted